



InfoVision Optoelectronics (Kunshan)Co., Ltd.


Document Title	P190MWW3 Customer Approved Specification			Page No.	1/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

Customer Approved Specification

To: 奥迪卡（香港）国际有限公司

Product Name: P190MWW3

Document Issue Date: 2010/7/15

Customer	InfoVision Optoelectronics
<u>SIGNATURE</u>	<u>SIGNATURE</u>
	REVIEWED BY
	QA  7/16/2010
	PREPARED BY
	FAE 
Please return 1 copy for your confirmation with your signature and comments.	

- Note: 1. Please contact InfoVision Company, before designing your product based on this product.
2. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by IVO for any intellectual property claims or other problems that may result from application based on the module described herein.

FQ-7-30-0-009-03D



InfoVision Optoelectronics (Kunshan)Co., Ltd.

Document Title	P190MWW3 Customer Approved Specification			Page No.	2/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

[illegible]

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	3/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

Contents

1.0	General Descriptions	p.3
2.0	Absolute Maximum Ratings	p.5
3.0	Pixel Format Image	p.6
4.0	Optical Characteristics	p.7
5.0	Electrical Characteristics	p.10
6.0	Interface Timings.....	p.16
7.0	Power Consumption	p.18
8.0	Power ON/OFF Sequence	p.19
9.0	Mechanical Characteristic.....	p.20
10.0	Package Specification	p.22
11.0	Lot Mark.....	p.23
12.0	General Precaution	p.24

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	4/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

1.0 General Descriptions**1.1 Introduction**

The P190MWW3 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. It is composed of a TFT LCD panel, a timing controller, voltage reference, common voltage, driver DC-DC converter, column driver, and row driver circuit. This TFT LCD has a 19-inch diagonally measured active display area with resolution (1,440 vertical by 900 horizontal pixel array).

1.2 Features

- 19" TFT LCD Panel
- Supported (V:1,440 lines, H:900 pixels) resolution
- Compatible with RoHS Standard

1.3 Product Summary

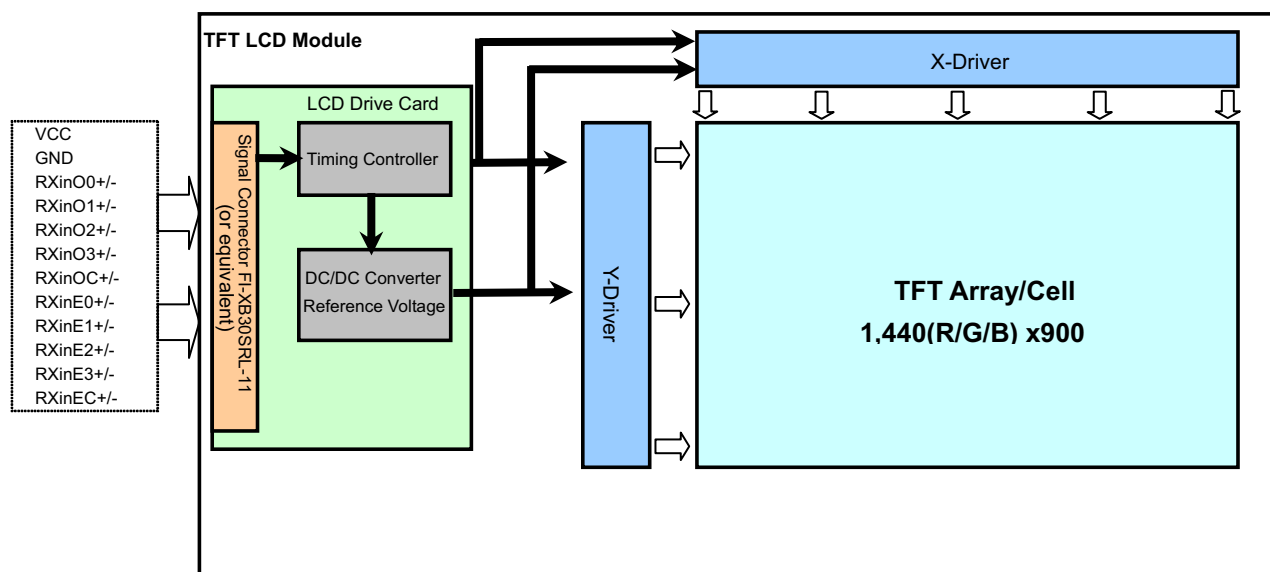
Items	Specifications	Unit
Screen Diagonal	18.95	inch
Active Area	408.24 (H) x 255.15 (V)	mm
Pixels H x V	1,440 (x3) x 900	
Pixel Pitch	0.2835 (per one triad) x 0.2835	mm
Pixel Arrangement	R.G.B. Vertical Stripe	
Display Mode	Normally White	
Response Time	5 (Typ.)	msec
Input Voltage	+ 5.0 (Typ.)	v
Logic Power Consumption	3.0 typical (Black pattern, 60Hz)	watt
Weight	455 (Typ.)	g
Electrical Interface (Logic)	dual LVDS	
Support Color	16.7M	
Optimum Viewing Direction	6 o'clock	
Surface Treatment	Anti Glare + HC	

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	5/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

1.4 Functional Block Diagram

Figure 1 shows the functional block diagram of the LCD module.

Figure 1 Block Diagram

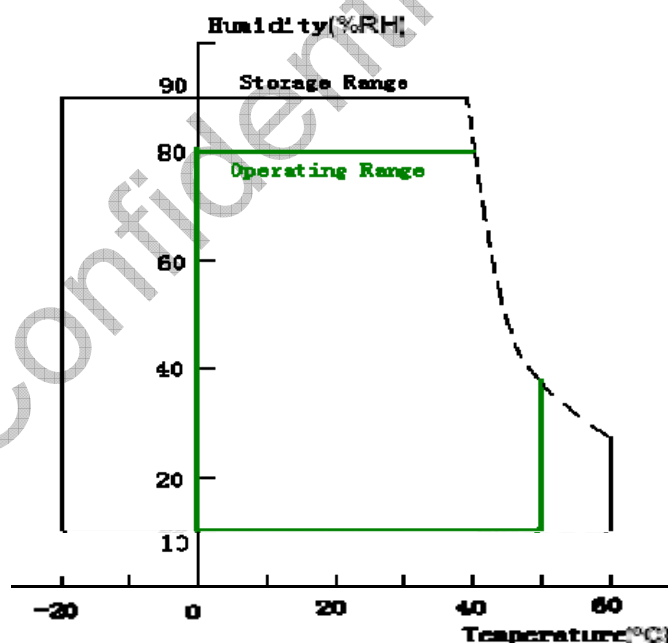
**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	6/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

2.0 Absolute Maximum Ratings**Table 1**

Item	Symbol	Min	Max	Unit	Conditions
Supply Voltage	VDD	-0.3	+6.0	V	
Input Signal		-0.3	+2.7	V	LVDS signals
Operating Temperature	TOP	0	+50	Deg. C	Note
Operating Humidity	HOP	10	80	%RH	Note
Storage Temperature	TST	-20	+60	Deg. C	Note
Storage Humidity	HST	10	90	%RH	Note

- Note
- (1) Maximum Wet-Bulb should be 39 degree C. No condensation.
 - (2) When you apply the LCD panel for OA system. Please make sure to keep the temperature of LCD panel is less than 60°C
 - (3) Storage /Operating temperature

Figure 2

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	7/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

3.0 Pixel Format Image

Figure 3 shows the relationship of the input signals and LCD pixel format image.

Figure 3 Pixel Format

	1	2	3	4													1439	1440													
1	R	G	B	R	G	B	R	G	B	R	G	B	..	..	..	..	..	..	..	..	..	..	..	..	R	G	B	R	G	B	
2	R	G	B	R	G	B	R	G	B	R	G	B	..	..	..	..	..	..	..	..	..	..	..	..	..	R	G	B	R	G	B
3	R	G	B	R	G	B	R	G	B	R	G	B	..	..	..	..	..	..	..	..	..	..	..	..	..	R	G	B	R	G	B
	:	:	:	:	:	:	:	:	:	:	:	:													:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:													:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:													:	:	:	:	:	:	
899	R	G	B	R	G	B	R	G	B	R	G	B	..	..	..	..	..	..	..	..	..	..	..	..	..	R	G	B	R	G	B
900	R	G	B	R	G	B	R	G	B	R	G	B	..	..	..	..	..	..	..	..	..	..	..	..	..	R	G	B	R	G	B

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	8/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

4.0 Optical Characteristics

The optical characteristics are measured under stable conditions as following notes

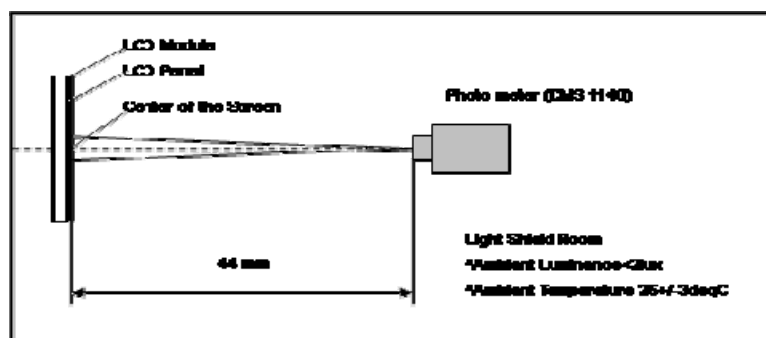
Table 2 Optical Characteristics

Item	Conditions	Specification			
		Min	Typ	Max	Note
Viewing Angle [degrees] K=Contrast Ratio>10	Left	75	85	--	A, B,E,G
	Right	75	85	--	
	Up	75	85	--	
	Down	65	75	--	
Contrast Ratio	--	750	1,000	--	A, C,E,,G
Response Time [ms]	Rising + Falling	--	5	10	A,D,E, G
Color Chromaticity (CIE1931)	Red x	-0.03	0.640	+0.03	A,E,G
	Red y		0.329		A,E,G
	Green x		0.283		A,E,G
	Green y		0.598		A,E,G
	Blue x		0.144		A,E,G
	Blue y		0.068		A,E,G
	White x		0.313		A,E,G
	White y		0.329		A,E,G
Panel Transmittance (%)		5.0	5.5	--	A, E,F,G

Note:

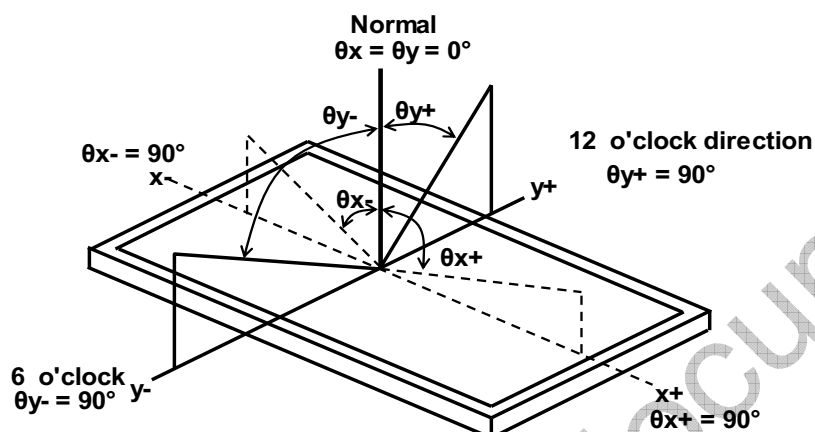
A. Measurement Setup:

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 30 minutes in a windless room.

Figure 4 Measurement Setup

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

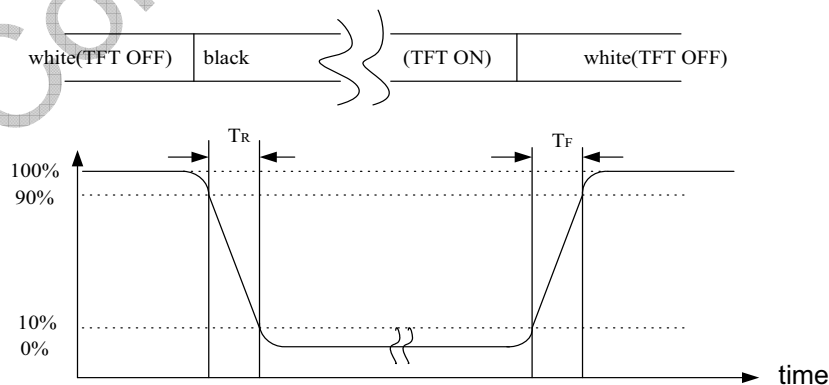
Document Title	P190MWW3 Customer Approved Specification			Page No.	9/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

B. Definition of Viewing Angle**Figure 5 Definition of Viewing Angle****C. Definition of Contrast Ratio (CR)**

The contrast ratio can be calculated by the following expression

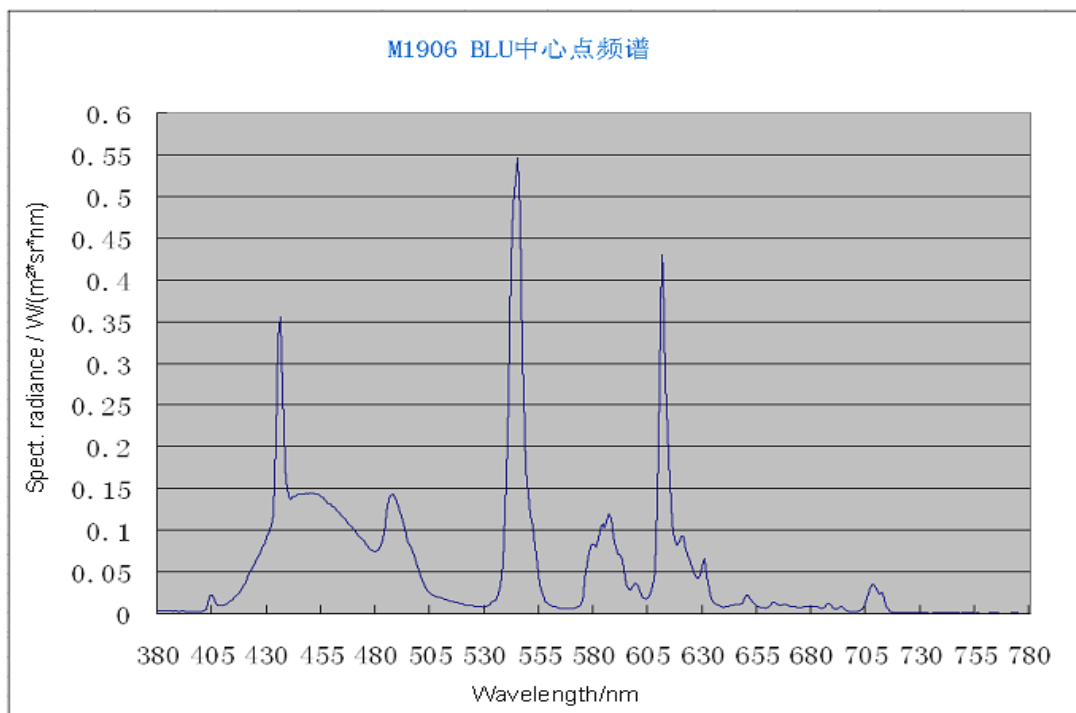
$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$

L255: Luminance of gray level 255, L0: Luminance of gray level 0

D. Definition of Response Time (T_R , T_F)**Figure 6 Definition of Response Time**

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	10/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

E. Black light spectrum (reference)**Figure 7 Center Point Spectrum****F. Definition of Transmittance(module is without signal input)**

$$\text{Transmittance} = \frac{\text{Luminance of LCD Module}}{\text{Luminance of Back light}} \times 100\%$$

G. Light source is the BLU which is supplied by IVO.

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	11/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

5.0 Electrical Characteristics**5.1 Interface Connector****Table 3 Connector Name / Designation**

Manufacturer	Jae (or Equivalent)
Type / Part Number	UJU IS100-L30R-C23, FCI 10061851-001
Mating Receptacle/Part Number	JAE FI-X30H(L), JAE FI-X30C*(L), JAE FI-X30M*

Table 4 Signal Pin Assignment

Pin #	Signal Name	Description	Remarks
1	RXinO0-	LVDS differential data input	
2	RXinO0+	LVDS differential data input	
3	RXinO1-	LVDS differential data input	
4	RXinO1+	LVDS differential data input	
5	RXinO2-	LVDS differential data input	
6	RXinO2+	LVDS differential data input	
7	GND	Ground	
8	RXOC-	LVDS differential data input	
9	RXOC+	LVDS differential data input	
10	RXinO3-	LVDS differential data input	
11	RXinO3+	LVDS differential data input	
12	RXinE0-	LVDS differential data input	
13	RXinE0+	LVDS differential data input	
14	GND	Ground	
15	RXinE1-	LVDS differential data input	
16	RXinE1+	LVDS differential data input	
17	GND	Ground	
18	RXinE2-	LVDS differential data input	
19	RXinE2+	LVDS differential data input	
20	RXEC-	LVDS differential data input	
21	RXEC+	LVDS differential data input	
22	RXinE3-	LVDS differential data input	
23	RXinE3+	LVDS differential data input	
24	GND	Ground	
25	GND	Ground	
26	NC	Reserved for LCD manufacturer.	
27	GND	Ground	

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	12/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

28	VDD	Power Supply	
29	VDD	Power Supply	
30	VDD	Power Supply	

All input signals shall be low or Hi-Z state when VDD is off.

IVO Confidential document

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	13/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

5.2 LVDS Receiver**5.2.1 Signal Electrical Characteristics for LVDS Receiver**

The built-in LVDS receiver is compatible with ANSI/TIA/TIA-644 standard.

Table 5 LVDS Receiver Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Differential Input High Threshold	Vth	--	--	+100	mV	Vcm=+1.2V
Differential Input Low Threshold	Vtl	-100	--	--	mV	Vcm=+1.2V
Magnitude Differential Input Voltage	Vid	100	--	600	mV	
Common Mode Voltage	Vcm	1.0	1.2	1.4	V	Vth - Vtl = 200mV
Common Mode Voltage Offset	ΔV_{cm}	-50	--	+50	mV	Vth - Vtl = 200mV

Note:

- A. Input signals shall be low or Hi-Z state when VDD is off.
- B. All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

Table 6 Timing Requirements

Parameter	Symbol	Min	Typ	Max	Unit	Conditions	Note
Clock Frequency	Fc	41.5	44.5	65.7	MHz		
Input Data Skew Margin	Trskm	-850		+850	ps	Fc=44.5MHz, Vth-Vtl = 400mV Vcm = 1.2V, ΔV_{cm} = 0	

Note: All values are at VDD=5.0V, Ta=25 degree C.



InfoVision Optoelectronics (Kunshan)Co., Ltd.

Document Title	P190MWW3 Customer Approved Specification			Page No.	14/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

Figure 8 Voltage Definitions

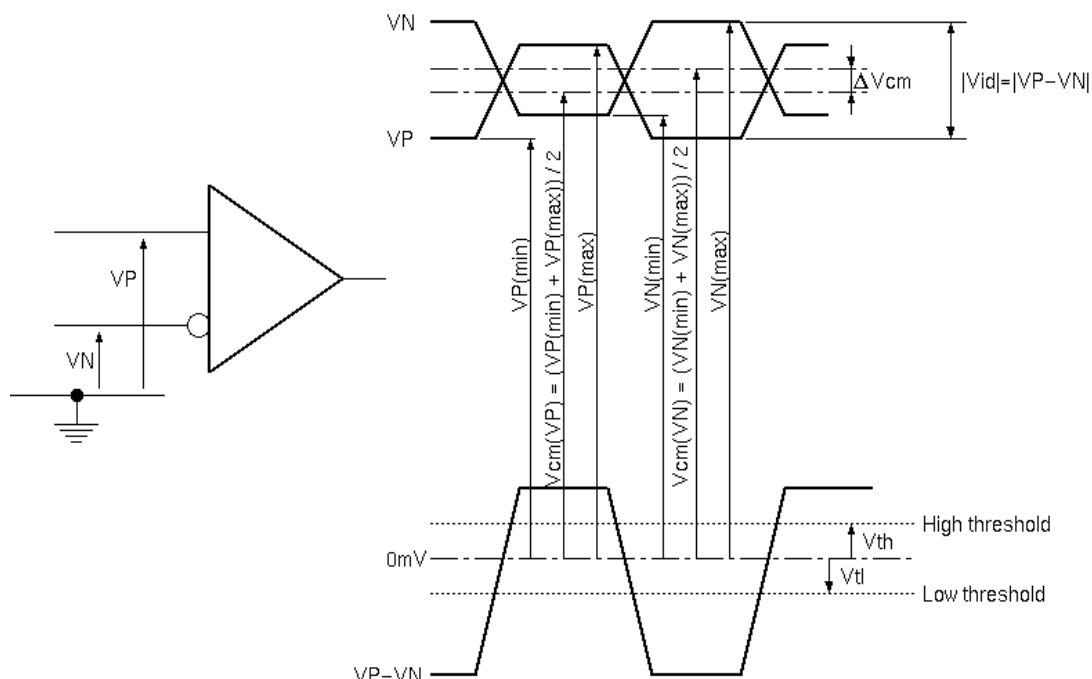
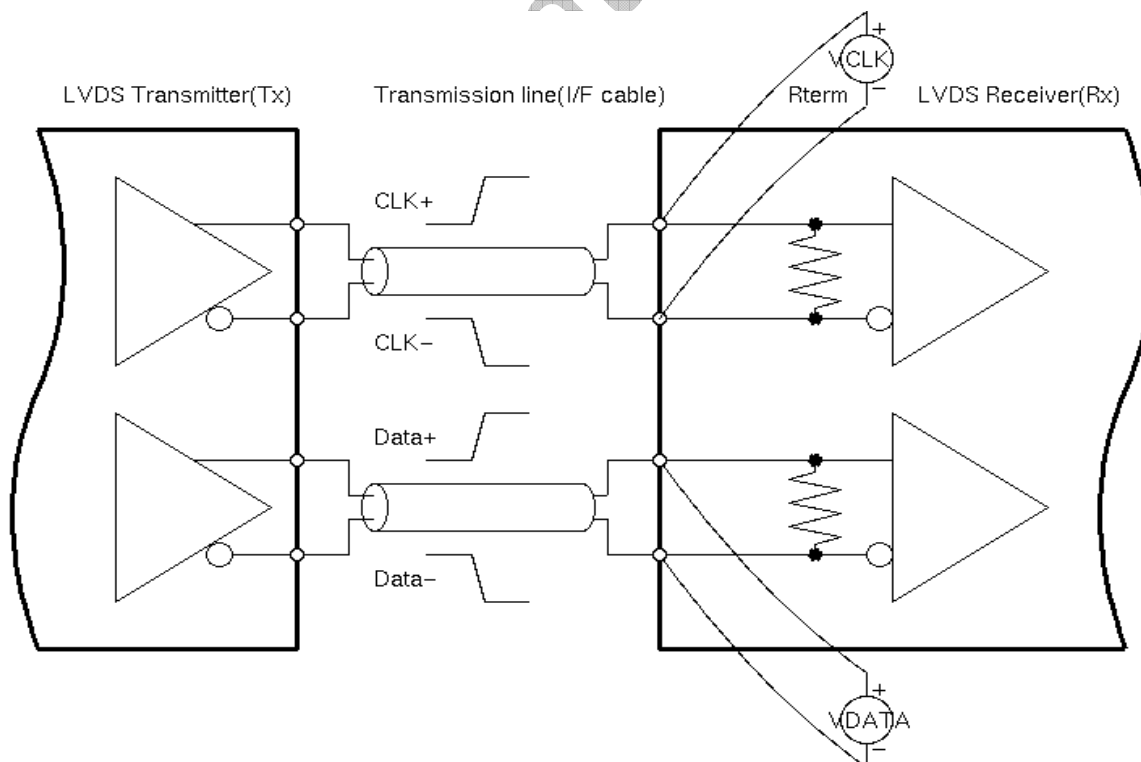
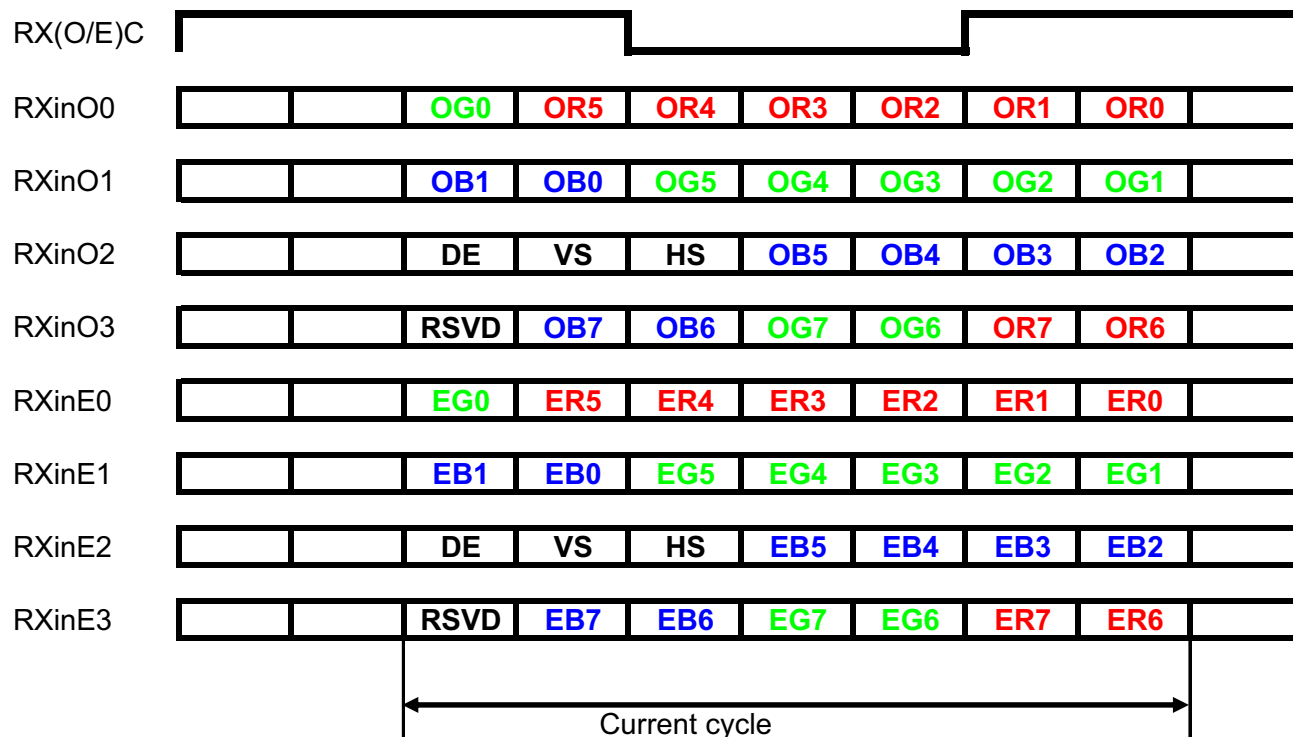


Figure 9 Measurement System



**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	15/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

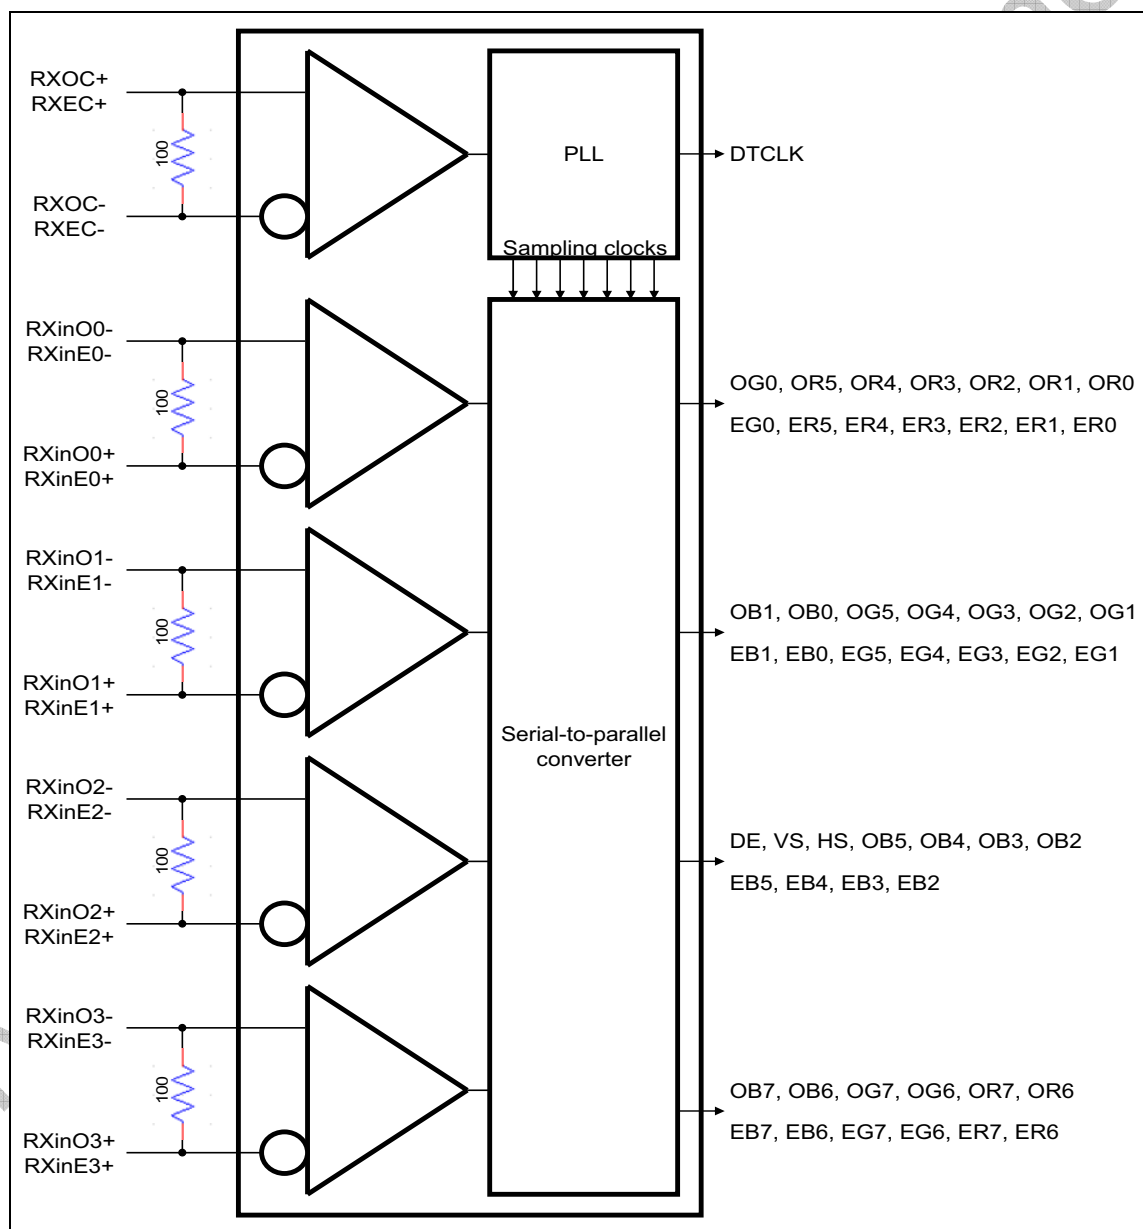
Figure 10 Data Mapping

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	16/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

5.2.2 LVDS Receiver Internal Circuit

Figure 11 LVDS Receiver Internal Circuit shows the internal block diagram of the LVDS receiver. This LCD module equips termination resistors for LVDS link.

Figure 11 LVDS Receiver Internal Circuit

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	17/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

6.0 Interface Timings**6.1 Timing Characteristics****Table 7 Interface Timings**

Parameter	Symbol	Unit	Min	Typ	Max
LVDS Clock Frequency(dual)	Fdck	MHz	41.5	44.5	65.7
H Total Time	Htotal	clocks	784	800	1,023
H Active Time	Hac	clocks	720	720	720
V Total Time	Vtotal	lines	918	926	1,400
V Active Time	Vac	lines	900	900	900
Frame Rate	Vsync	Hz	55.0	60.0	75.0

Note (1) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

(2) Internal Vcc= 5.0V.

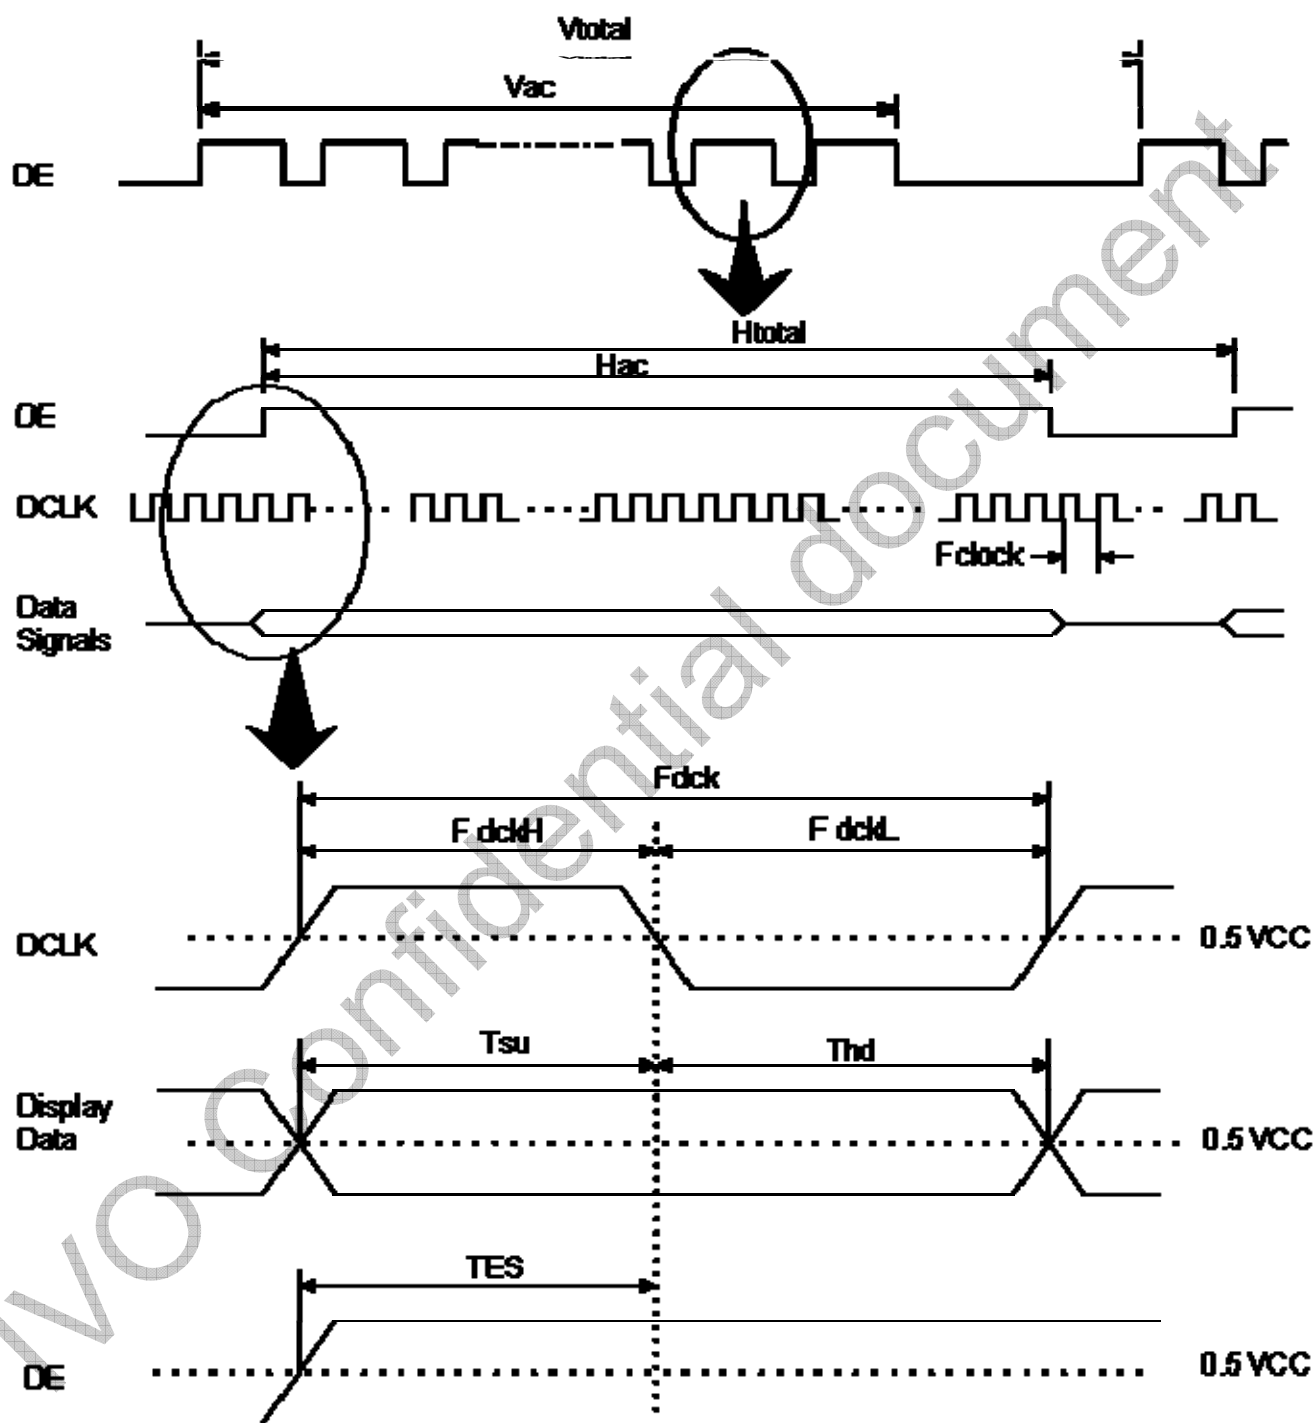
IVO Confidential document



InfoVision Optoelectronics (Kunshan)Co., Ltd.

Document Title	P190MWW3 Customer Approved Specification			Page No.	18/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

Figure 12 Timing Characteristics



Note: TES is data enable signal setup time.

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	19/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

7.0 Power Consumption

Input power specifications are as follows.

Table 8 Power Consumption

Symbol	Parameter	Min	Typ	Max	Units	Condition
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[V]	--
IDD	VDD Current	--	0.60	0.95	[A]	All black pattern, 60Hz
PDD	VDD Power	--	3.0	--	[W]	All black pattern, 60Hz
Irush	Rush Current	--	--	3.0	[A]	Vdd rising time over 0.5ms.Oscilloscope Sampling over 2ms
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	--	--	300	[mVp-p]	--

IVO Confidential document

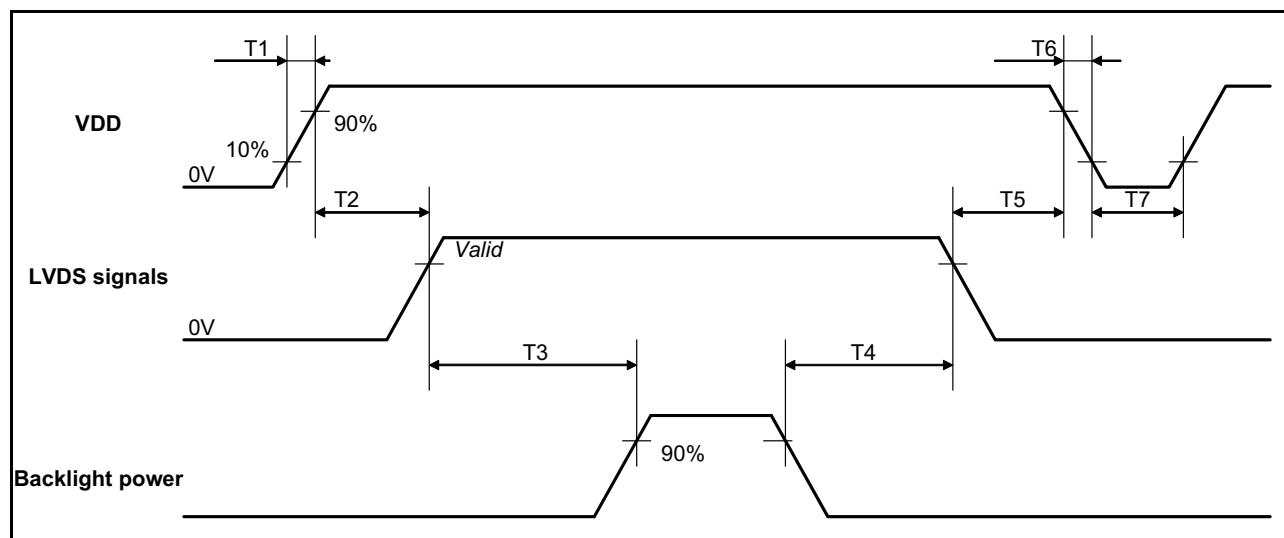
**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	20/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

8.0 Power ON/OFF Sequence

VDD power, interface signals, and lamp on/off sequence are shown in

Figure 13 Signals shall be Hi-Z state or low level when VDD is off.

Figure 13 Power Sequence**Table 9 Power Sequencing Requirements**

Parameter	Symbol	Unit	Min	Typ	Max
VDD Rise Time	T1	ms	0.5	--	10
VDD Good to Signal Valid	T2	ms	0	--	50
Signal Valid to Backlight On	T3	ms	200	--	--
Backlight Off to Signal Disable	T4	ms	100	--	--
Signal Disable to Power Down	T5	ms	0	--	50
VDD Fall Time	T6	ms	--	--	10
Power Off	T7	ms	1,000	--	--

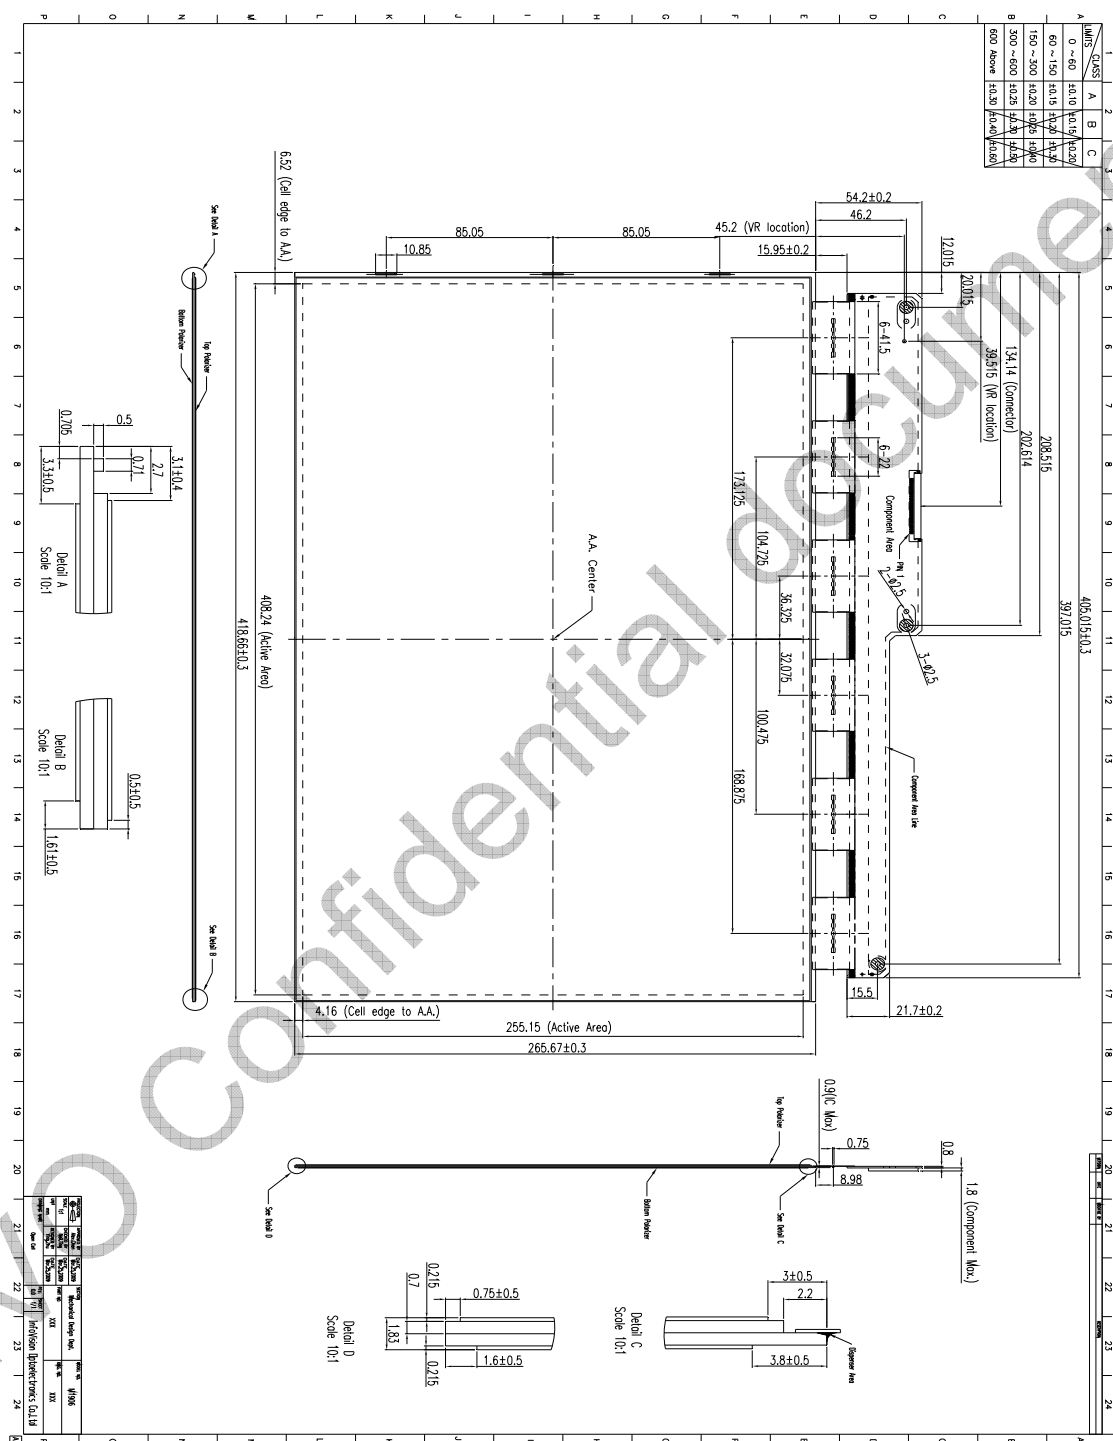


InfoVision Optoelectronics (Kunshan)Co., Ltd.

Document Title	P190MWW3 Customer Approved Specification			Page No.	21/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

9.0 Mechanical Characteristics

Figure 14 Reference Outline Drawing



**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	22/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

9.1 Dimension Specifications**Table 10 Open Cell Dimension Specifications**

Width [mm]		418.66 ± 0.3
Height [mm]		319.87± 0.3
Thickness [mm]	Glass(cell)	1.83±0.2
	PCB	0.8±0.1
	Component	1.8(max)
Weight [g]		455 (Typ.)

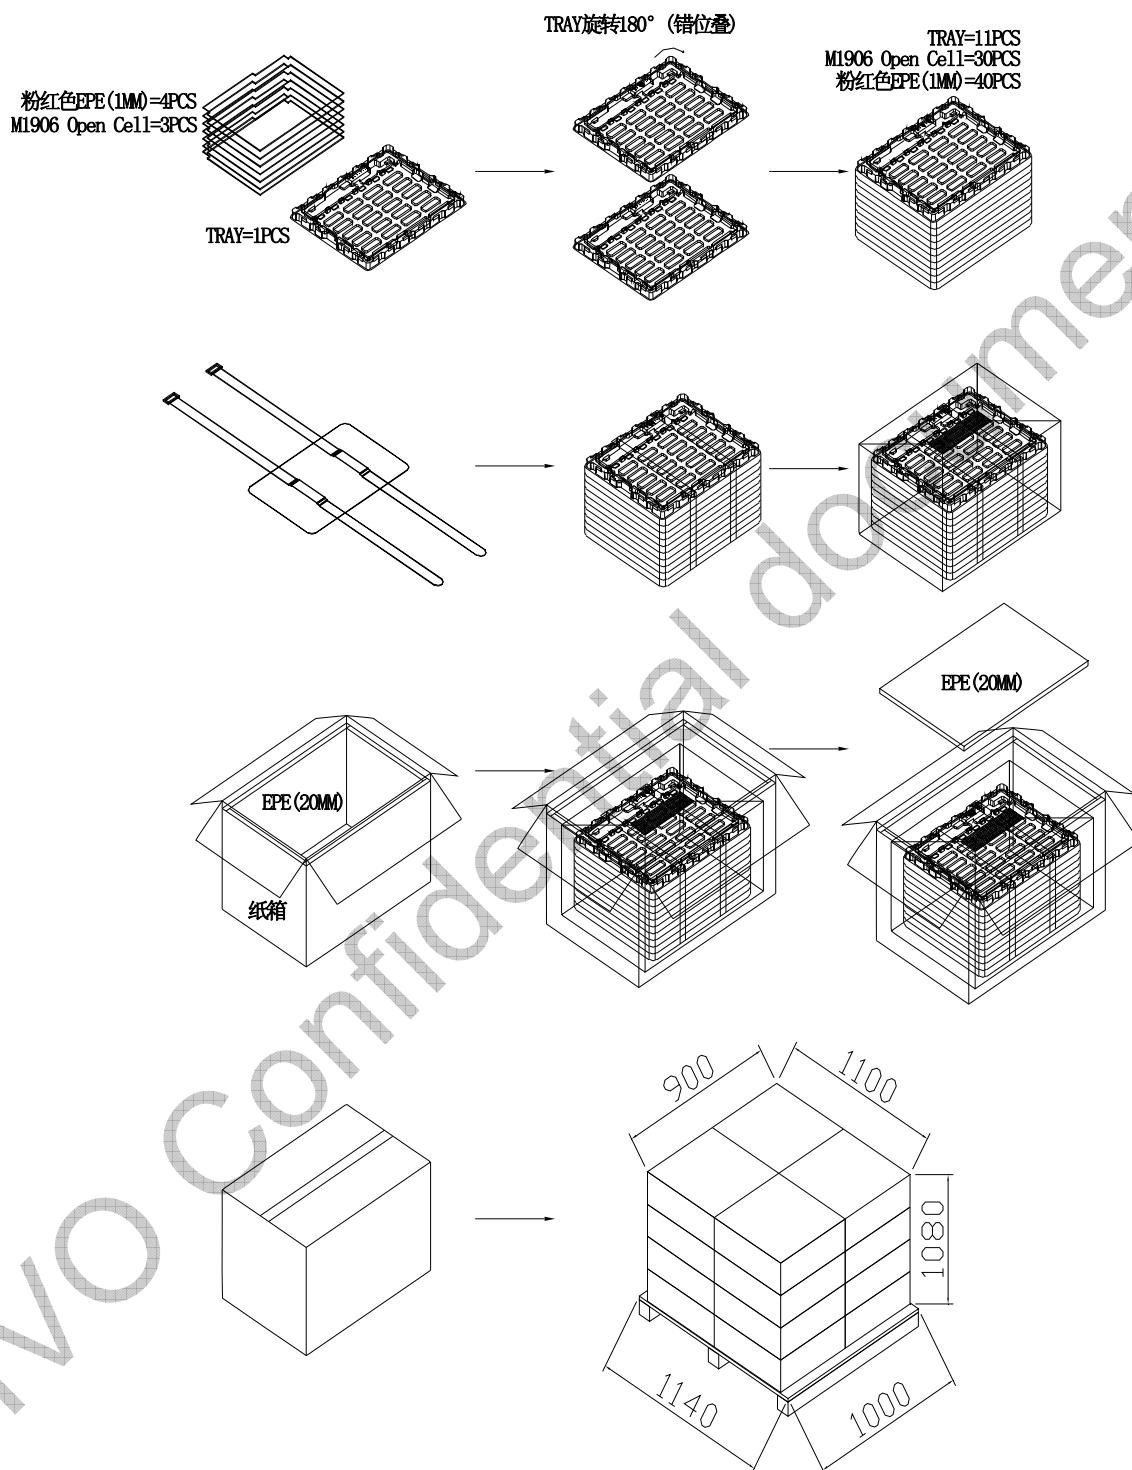
IVO Confidential document



InfoVision Optoelectronics (Kunshan)Co., Ltd.

Document Title	P190MWW3 Customer Approved Specification			Page No.	23/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

10.0 Package Specification



**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	24/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

11.0 Lot Mark

Product name

Development Product Name

H/W: 2nd source/ version

F/W: EDID version (NB Product only)

23 product code

11.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

code 1,2,4,5,6,7,8,9,10,11,16: IVO internal flow control code.

code 3: production location.

code 12: production year.

code 13: production month.

code 14,15: production date.

Code 17,18,19,20: serial number.

Note (1) Production Year

Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Mark	6	7	8	9	A	B	C	D	E	F

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

11.2 23 product barcode

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----

code 1,2: MD Mindtech Display.

code 3,4,5,6,7: IVO internal module name.

code 8,9,10,13,16: IVO internal flow control code.

code 11,12: Cell location Suzhou defined as "SZ".

code 14,15: Module line kunshan defined as "KS".

code 17,18,19: Year, Month, Day Refer to Note(1) and Note(2) of Lot Mark.

code 20~23: Serial Number.

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	25/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

12.0 General Precaution**12.1 Use Restriction**

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

12.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. MTD does not warrant the module, if customers disassemble or modify the module.

12.3 Breakage of LCD Panel

12.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid Crystal, and do not contact liquid crystal with skin.

12.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.

12.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and Rinse thoroughly with water.

12.3.4 Handle carefully with chips of glass that may cause injury, when the glass is

12.4 Absolute Maximum Ratings and Power Protection Circuit

12.4.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature; etc otherwise LCD module may be damaged.

12.4.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

12.4.3 It's recommended employing protection circuit for power supply.

12.5 Operation

12.5.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead. Use fingerstalls of soft gloves in order to keep clean display quality, when Persons handle the LCD module for incoming inspection or assembly.

12.5.2 When the surface is dusty, please wipe gently with absorbent cotton or other soft Material

12.5.3 Wipe off saliva or water drops as soon as possible. If saliva or water drops Contact with polarizer for a long time, they may causes deformation or color Fading

12.5.4 When cleaning the adhesives, please use absorbent cotton wetted with a little Petroleum benzene or other adequate solvent

12.6 Static Electricity

12.6.1 Protection film must remove very slowly from the surface of LCD module to Prevent from electrostatic occurrence.

12.6.2 Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is Very weak to electrostatic discharge, Please be careful with electrostatic Discharge

12.6.3 Persons who handle the module should be grounded through adequate methods.

12.7 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, Display characteristics may be changed.

**InfoVision Optoelectronics (Kunshan)Co., Ltd.**

Document Title	P190MWW3 Customer Approved Specification			Page No.	26/26
Document No.	A-P190MWW3-12-02	Issue date	2010/7/15	Revision	V00

12.8 Disposal

When disposing LCD module, obey the local environmental regulations.

IVO Confidential document